




SHIM T-BLOCK

Very compact shim block for adjusting locator details on welding and other fixtures and machinery.


Two sizes available with metric or inch fastener. The DBM Shim T-Block comes complete with socket head screw, washer and shim pack.

.18" (4.5mm) THICK SHIM SUPPLIED
DESIGN FOR .12" (3mm) NOMINAL

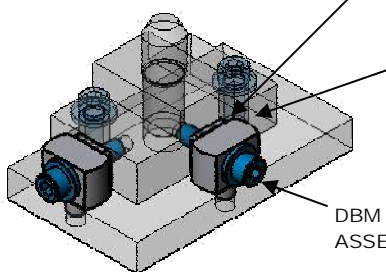


USE OVERSIZED MTG. HOLES
FOR X AND Y ADJUSTMENT

DBM SHIM T-BLOCK
ASSEMBLY

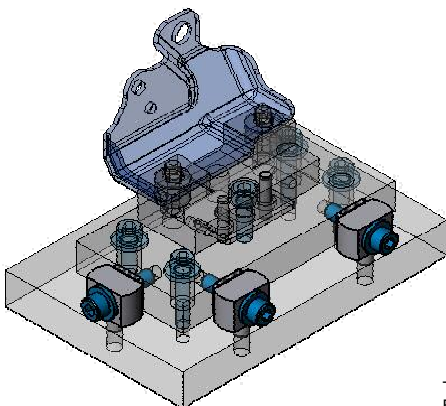

N63 W23583 Main Street
P.O. Box 482
Sussex, WI 53089
(262) 246-8075
FAX: (262)-246-9075

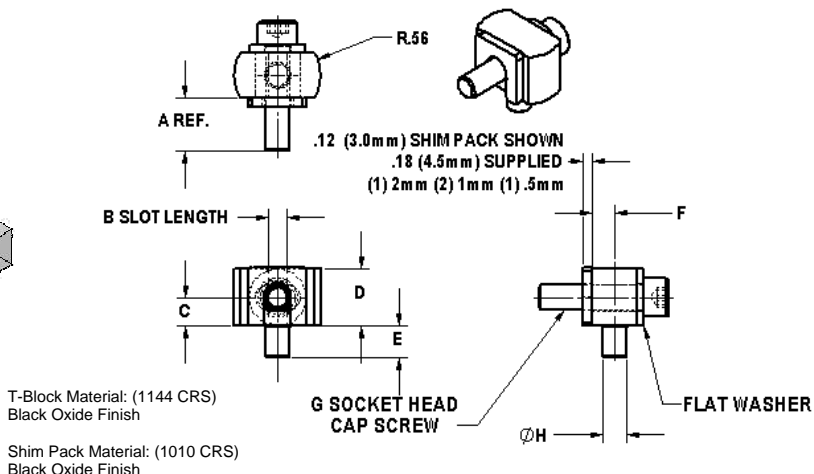

SHIM T-BLOCK ASSEMBLY DIMENSIONS

PART NO.	SB-6A	SB-8A	SB-1/4A	SB-5/16A
	millimeters	millimeters	inches	inches
A	13.2	17.8	0.52	0.70
B	6.1	7.9	0.24	0.31
C	7.9	9.6	0.31	0.38
D	16.0	19.0	0.63	0.75
E	7.9	10.4	0.31	0.41
F	5.1	7.6	0.20	0.30
G	SHCS M6-1.00 X 25LG	SHCS M8-1.25 X 35LG	SHCS 1/4-20 X 1.00LG	SHCS 5/16-18 X 1.38LG
H	6mm +0/-0.025	8mm +0/-0.025	.236" +0/-0.001	.315" +0/-0.001
J	11.1	14.2	0.44	0.56

The specifications and data in this publication are believed to be accurate and reliable. However, it is the responsibility of the product user to determine the suitability of DBM Innovation Inc. products for a specific application. While defective products will be replaced with no charge if promptly returned, no liability is assumed beyond such replacement. Specifications subject to change without notice.

©2007 DBM Innovation Inc., All rights reserved